


QR4: Horizontal Three Speaker Array

Order Ref: ACHPI-QR4

Introduction

The QR4 kit allows for three HPI110 speakers to be hung horizontally.

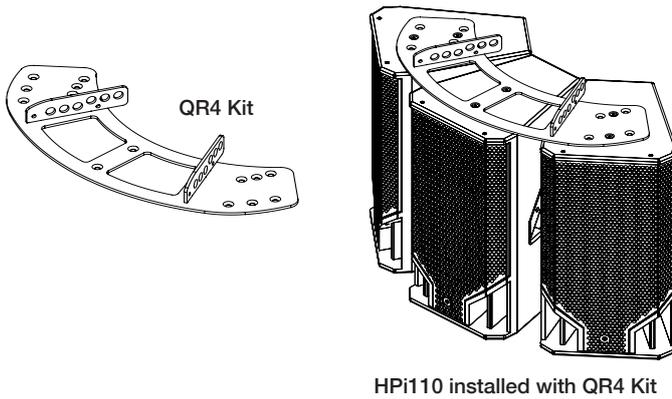


Kit Contents

- Hanging Plate
- Screws (6 x M10)


Tilt Angle

The natural hang tilt angle of the horizontal array is controlled by the shackle location on the top spine

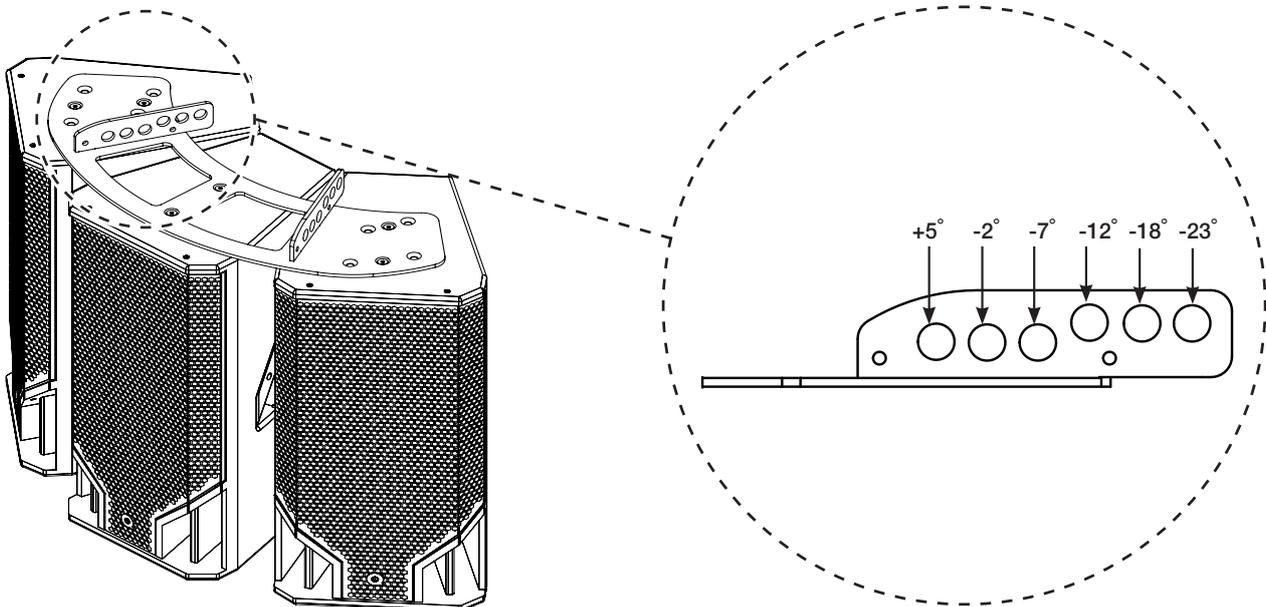


Mounting the Speakers


1. Remove the 2 M10 screws at the top of each speaker and discard.

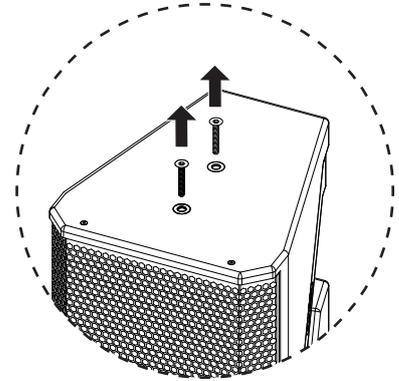


2. Place the hanging plate on top of the 3 speakers and align to the desired angles.

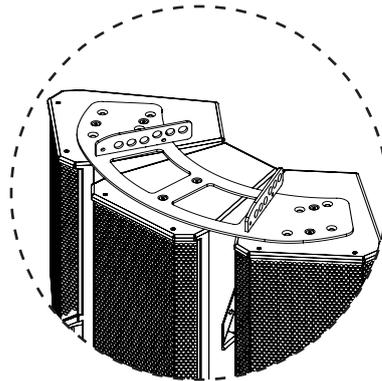

Approximate coverage angle

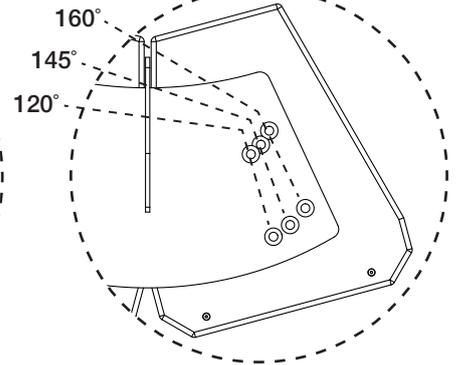

3. Bolt in the M10 x 35mm counter sunk screws included in the kit to lock the position to the required coverage angle.
Add locking paste to give additional security.

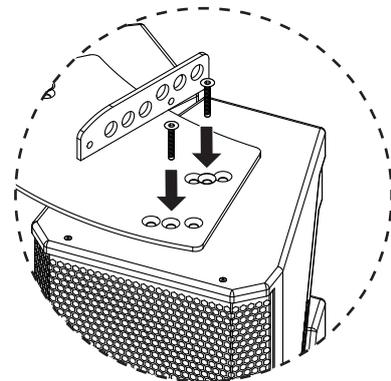

Warning

Attach the plate to the speaker boxes with the installation bolts supplied with the QR4.



Caution

It is preferable to coat the bolts with thread locking paste for maximum protection against bolts becoming loose over time.

Safety Precautions

- ✓ Avoid installing the mounting hardware on unstable structures, such as on unreinforced walls or ceiling beams that are not designed to carry extra weight.
- ✓ Refer all installation work to the dealer from whom the speaker was purchased. Installation for flying speaker systems requires extensive technical knowledge and experience. The speaker or rigging hardware may detach if not correctly installed, resulting in serious injury to people below.
- ✓ Check that all elevated work platforms or other height access devices (ladders etc.) will safely carry the weight of the products to be elevated and the weight of the installation personnel before starting the installation.
- ✓ Be sure to follow the flying instructions exactly as described. Do not take shortcuts during the installation and flying process. Identify any possible risks or hazards before beginning the setup\ installation. Time and care should be taken so as not to expose yourself or other workers to danger with unsafe practices.
- ✓ Check to confirm that suspension wires are strong enough, correctly terminated and sufficient to carry the total load with at least a 4:1 safety rating.
- ✓ The connectors of the suspension wires and belts must be securely linked with those of the speaker or rigging hardware.
- ✓ Be sure to use screws supplied with the optional flying hardware when installing any mounting hardware or the speaker itself.
- ✓ Install the unit only in a location that can structurally support the weight of the unit and the mounting bracket.
- ✓ Do not use other methods than those specified to mount the speaker boxes.
- ✓ Use nuts and bolts that are appropriate for the ceilings or wall's structure and composition.
- ✓ Use only the specified mounting brackets. No warranty is provided due to damage resulting from a failure of after-market accessories.



Caution

After installation periodically have the rigging and installation fittings checked by a competent technician or rigging specialist. Failure to do so may result in a loudspeaker or rigging element falling and causing injury.



www.questengineering.com.au

Quest Engineering Pty. Ltd.

130 - 140 Melrose Drive, Tullamarine Vic. 3043 Australia

Phone: +61 (03) 8373 6868